

PRE-GROUTING PROTECTIVE AGENT

**UNPOLISHED STONE AND AGGLOMERATES,
TERRACOTTA, QUARRY TILES**




WHAT IT'S FOR

- Water-based water-repellent protector against soiling that occurs when fixing. Makes grouting and cleaning easier without altering the material's appearance.
- Ideal for absorbent materials such as terracotta, quarry tiles, natural and reconstructed stone and agglomerates.

ADVANTAGES

- Protects against grouting.
- It does not affect adhesion between grout and material.
- It makes cleaning after laying simple.
- It reduces drying times, making subsequent treatment faster.
- Does not affect the material's appearance.
- Non sacrificial.
- Easy application.
- After the application it is possible to apply any kind of protection treatment.
- This product has extremely low emissions of VOC: certified by GEV and marked by EC1Plus and helps towards gaining credits for the LEED.

PRW200 facilitates grouting and subsequent cleaning operations, reducing the drying and after-laying treatment times, while protecting the material against water absorption.

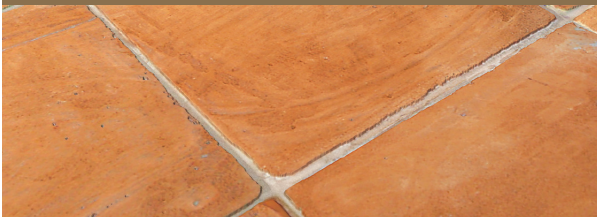

COVERAGE

With one litre:

Terracotta rustic Tuscan, polished	15/20 m ²
Terracotta handmade, Spanish, hollow tile, brick	7/10 m ²
Stone	10/20 m ²

"Coverage shown is for guidance purposes only and refers to single coats"

Packaging

- 1 litre: boxes of 12.
- 5 litres: boxes of 4.

WARNINGS

- Keep out of reach of children.
- Do not disperse into the environment after use.

TEMPERATURES

Storage temperature: from 5° to 30° C.
This product must be applied to surfaces with temperature between 10°C and 30°C.

HOW TO USE IT

No dilution required: ready to use.

Application: Shake before use. Remove any dust from the surface to be treated. Apply one coat of PRW200 using a flat paintbrush, fleece or other applicator in a uniform manner, avoiding any pooling. Also apply to the edges of the laid material with care. The surface can be grouted the day after application. Once thoroughly set, wash the surface using the most suitable cleaner for the type of material used. Assess which type of subsequent protective treatment to complete the protection cycle.


FOR PROFESSIONAL USE ONLY: spray the product (airless system) on vertical surfaces until they are saturated and use appropriate PPE, as specified in the safety information sheet.

Caution:

Carry out a patch test on a small surface area to check for any changes in colour. Do not apply the product externally if rain is forecast.



- **TERRACOTTA**
- **QUARRY TILES**
- **UNPOLISHED STONE AND AGGLOMERATES**

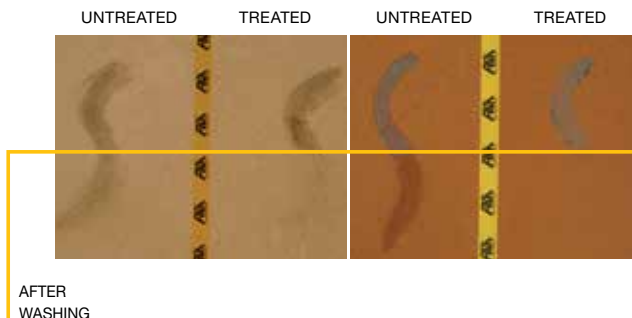

Stain-proofing test carried out on Vicenza stone and terracotta. The untreated section absorbed the grout deep down, which made it difficult to clean after laying. The treated part did not absorb the grout and it was easy to remove with the specific detergent.

WHAT IT'S FOR

- Water-based water-repellent protector against soiling that occurs when fixing. Makes grouting and cleaning easier without altering the material's appearance.
- Ideal for absorbent materials such as terracotta, quarry tiles, natural and reconstructed stone and agglomerates.

ADVANTAGES

- Protects against grouting.
- It does not affect adhesion between grout and material.
- It makes cleaning after laying simple.
- It reduces drying times, making subsequent treatment faster.
- Does not affect the material's appearance.
- Non sacrificial.
- Easy application.
- After the application it is possible to apply any kind of protection treatment.
- This product has extremely low emissions of VOC: certified by GEV and marked by EC1^{plus} and helps towards gaining credits for the LEED.

HOW TO USE IT

No dilution required: ready to use.

Application:

Shake before use. Remove any dust from the surface to be treated. It can also be applied with a flat paintbrush or a fleece pad. Also apply to the edges of the laid material with care. Grouting can be done the day after application, taking care to sponge off the excess before it dries completely. Once thoroughly set, wash the surface using the most suitable detergent for the kind of material used. Assess which type of subsequent protective treatment to complete the protection cycle.

FOR PROFESSIONAL USE ONLY:

spray the product (airless system) on vertical surfaces until they are saturated and use appropriate PPE, as indicated in the safety information sheet.

Caution:

Carry out a patch test on a small surface area to check for any changes in colour. Do not apply the product externally if rain is forecast.

COVERAGE

With one litre:

Terracotta rustic Tuscan, polished	15/20 m ²
Terracotta handmade, Spanish, hollow tile, brick	7/10 m ²
Pietra	10/20 m ²

"Coverage shown is for guidance purposes only and refers to single coats"

Packaging

- 1 litre cans in boxes of 12.
- 5-litre cans in boxes of 4.

WARNINGS

- Keep out of reach of children.
- Do not disperse into the environment after use.

TEMPERATURES
Storage temperature: from 5° to 30° C
The product must be applied to material with a temperature of between 10° and 30°C.

COMPOSITION
A blend of resins in emulsion dispersed in water.

LABELLING
No safety and risk labelling or instructions are required, as the product is not classified as hazardous under current regulations.

TECHNICAL FEATURES
Appearance: liquid
Colour: milky white
Odour: typical of resin
Density: 0.999 kg/l
pH: 4.7

This information is the result of our most up-to-date technical know-how and is based on ongoing laboratory research and testing. Nevertheless, for reasons beyond our control, any suggestions always require appropriate analysis, testing and monitoring. Fila shall not accept any responsibility for improper use of its products.